
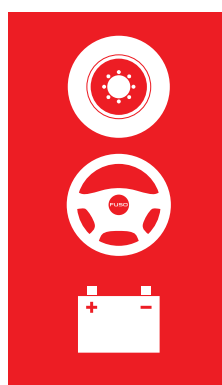



# FUSO CANTER

# CANTER

## LIGHT DUTY



DIMENSIONS & WEIGHT		FE71	FE84	FE85
Overall Length / Width / Height	(mm)	4,660 / 1,695 / 2,005	6,750 / 1,995 / 2,200	7,210 / 2,315 / 2,270
Wheelbase	(mm)	2,500	3,850	4,170
Wheel Tread (Front / Rear)	(mm)	1,390 / 1,380	1,655 / 1,495	1,665 / 1,660
Min. Ground Clearance	(mm)	200	200	210
Frame Width	(mm)	700	753	840
Curb Weight	(kg)	1,760	2,290	2,610
Payload	(kg)	2,640	4,210	5,590
GVW	(kg)	4,400	6,500	8,200
ENGINE		FE71	FE84	FE85
Model		4M42-3AT2	4M42-3AT4	4M50-5AT5
Type		4-Stroke Direct Injection Diesel with Turbocharger		
Cylinders		In-line 4		
Displacement	(cc)	2,977		4,899
Compression Ratio		15.5:1		
Bore x Stroke	(mm)	95 x 105		114 x 120
Max. Power	(Ps / rpm)	125 / 3,200	145 / 3,200	179 / 2,700
Max. Torque	(N-m / rpm)	294 / 1,700	362 / 1,700	530 / 1,600
Fuel Tank Capacity	(L)	70	100	
TRANSMISSION		FE71	FE84	FE85
Type		5 Forward and 1 Reverse M/T (2nd - 5th Synchronesh, 1st and Reverse Constantmesh)		6 Forward and 1 Reverse M/T (2nd - 6th Synchronesh, 1st and Reverse Constantmesh)
Gear Ratios	1st	5.175	5.400	
	2nd	3.261	3.657	
	3rd	1.785	2.368	
	4th	1.000	1.465	
	5th	0.715	1.000	
	6th	-	0.711	
	Reverse	5.175	5.400	
Final Gear Ratio		5.714		
AXLE		FE71	FE84	FE85
Front / Rear		Reverse Elliot "I" Beam / Fully Floating		
SUSPENSION				
Front		Laminated Leaf Spring with Stabilizer		Laminated Leaf Spring
Rear		Laminated Leaf Spring		
Shock Absorber (Front and Rear)		Double Acting Hydraulic Telescopic		
BRAKE				
Service		Hydraulic with Vacuum Servo Assistance, Dual Circuit		
Parking		Internal Expanding Type on Propeller Shaft		
Auxiliary		Exhaust Brake		
TIRE & WHEEL		FE71	FE84	FE85
Tire (Single Front / Dual Rear)		7.50 R15-12PR	7.00 R16-12PR	7.50 R16-14PR
Wheel		15 x 6.00GS - 50mm - 6t 6 studs, 2 pcs. (Steel Rim)	16 x 5.50F - 115mm - 8t 5 studs, 2 pcs. (Steel Rim)	16 x 6.00GS - 127mm - 9t 6 studs, 2 pcs. (Steel Rim)
STEERING				
Gear Type		Ball and Nut Type with Integral-type Hydraulic Power Booster		
Power Steering		Equipped		
Steering Wheel Adjust		Tilt and Telescopic		
SAFETY				
		3 pt. ELR x2 and 2 pt. Lapbelt (Center), Collapsible Steering Wheel, and Side Impact Beams		
ELECTRICAL SYSTEM				
Battery (Voltage and Amperage)		12V / 75A		12V (x2) / 80A

Photos and specifications may vary from actual unit. Sojitz Fuso Philippines reserves the right to change specifications without prior notice.



FUSO authorized distributor  
**SOJITZ FUSO PHILIPPINES CORPORATION**  
[www.fuso.com.ph](http://www.fuso.com.ph)

Brochure part no.: L010101



SOJITZ FUSO PHILIPPINES CORPORATION





### Canter FE85

- 6-wheeler • 18-footer • 8.2T
- 4.9L Turbo Direct Injection Diesel
- (Reefer Van optional rear body)

### Canter FE84

- 6-wheeler • 16-footer • 6.5T
- 3.0L Turbo Direct Injection Diesel
- (Aluminum Van optional rear body)

### Canter FE71

- 4-wheeler • 10-footer • 4.4T
- 3.0L Turbo Direct Injection Diesel
- (FB optional rear body)



The Canter boasts of a comfortable cabin with reclining seats and more than enough legroom.



Tilt and telescopic adjustable steering wheel



First-in-class dash-mounted gear shift lever



The tilt & telescopic adjustable steering wheel and dash-mounted gear shift location allows for the best driving position. (Audio head unit is customer option.)