

FUSO CANTER

CANTER

LIGHT DUTY




DIMENSIONS & WEIGHT		FE71	FE73	FE84	FE85
Overall Length / Width / Height	(mm)	4,660 / 1,695 / 2,005	5,885 / 1,865 / 2,055	6,750 / 1,995 / 2,200	7,210 / 2,135 / 2,270
Wheelbase	(mm)	2,500	3,350	3,850	4,170
Wheel Tread (Front / Rear)	(mm)	1,390 / 1,380	1,390 / 1,435	1,655 / 1,495	1,665 / 1,660
Min. Ground Clearance	(mm)	200	200	200	210
Frame Width	(mm)	700	700	753	840
Curb Weight	(kg)	1,760	1,965	2,290	2,610
Payload	(kg)	2,640	2,525	4,210	5,590
GVW	(kg)	4,400	4,490	6,500	8,200



ENGINE		FE71	FE73	FE84	FE85
Model		4M42-3AT2		4M42-3AT4	4M50-5AT5
Type		4-Stroke Direct Injection Diesel with Turbocharger			
Cylinders		In-line 4			
Displacement	(cc)	2,977		4,899	
Compression Ratio		15.5:1			
Bore x Stroke	(mm)	95 x 105		114 x 120	
Max. Power	(Ps / rpm)	125 / 3,200		145 / 3,200	179 / 2,700
Max. Torque	(N-m / rpm)	294 / 1,700		362 / 1,700	530 / 1,600
Fuel Tank Capacity	(L)	70	100	100	100



TRANSMISSION		FE71	FE73	FE84	FE85
Type		5 Forward and 1 Reverse M/T (2nd - 5th Synchronmesh, 1st and Reverse Constantmesh)		6 Forward and 1 Reverse M/T (2nd - 6th Synchronmesh, 1st and Reverse Constantmesh)	
Gear Ratios	1st	5.175		5.400	
	2nd	3.261		3.657	
	3rd	1.785		2.368	
	4th	1.000		1.465	
	5th	0.715		1.000	
	6th	-		0.711	
	Reverse	5.175		5.400	
Final Gear Ratio		5.714			



AXLE		FE71	FE73	FE84	FE85
Front / Rear		Reverse Elliot "I" Beam / Fully Floating			
SUSPENSION					
Front		Laminated Leaf Spring with Stabilizer		Laminated Leaf Spring	
Rear		Laminated Leaf Spring			
Shock Absorber (Front and Rear)		Hydraulic Double Acting Telescopic			



BRAKE		FE71	FE73	FE84	FE85
Service		Hydraulic with Vacuum Servo Assistance, Dual Circuit			
Parking		Internal Expanding Type on Propeller Shaft			
Auxiliary		Exhaust Brake			

TIRE & WHEEL		FE71	FE73	FE84	FE85
Tire (Single Front / Dual Rear)		7.50 R15-12PR		7.00 R16-12PR	7.50 R16-14PR
Wheel		15 x 6.00GS - 50mm - 6t 6 studs, 2 pcs. (Steel Rim)	15 x 5.50F - 115mm - 8t 5 studs, 2 pcs. (Steel Rim)	16 x 5.50F - 115mm - 8t 5 studs, 2 pcs. (Steel Rim)	16 x 6.00GS - 127mm - 9t 6 studs, 2 pcs. (Steel Rim)

STEERING		FE71	FE73	FE84	FE85
Gear Type		Ball and Nut Type with Integral Type Hydraulic Power Booster			
Power Steering		Equipped			
Steering Wheel Adjust		Tilt and Telescopic			

SAFETY		FE71	FE73	FE84	FE85
		3 pt. ELR x2 and 2 pt. Lapbelt (Center), Collapsible Steering Wheel, and Side Impact Beams			

ELECTRICAL SYSTEM		FE71	FE73	FE84	FE85
Battery (Voltage and Amperage)		12V / 75A		24V / 80A	

Photos and specifications may vary from actual unit. Sojitz Fuso Philippines reserves the right to change specifications without prior notice.



*3 yrs or 100,000 KMs whichever comes first

FUSO authorized distributor
SOJITZ FUSO PHILIPPINES CORPORATION
www.fuso.com.ph

DAIMLER | Fuso Trucks and Bus - A Daimler Brand

MADE IN JAPAN



SOJITZ FUSO PHILIPPINES CORPORATION

Available in various rear body applications



Canter FE85

- 6-wheeler • 18-footer • 8.2T
- 4.9L Turbo Direct Injection Diesel
- (Reefer Van optional rear body)

Canter FE84

- 6-wheeler • 16-footer • 6.5T
- 3.0L Turbo Direct Injection Diesel
- (Rivetless Aluminum optional rear body)

Canter FE73

- 6-wheeler • 14-footer • 4.49T
- 3.0L Turbo Direct Injection Diesel
- (Dropside optional rear body)

Canter FE71


- 4-wheeler • 10-footer • 4.4T
- 3.0L Turbo Direct Injection Diesel
- (Passenger Van optional rear body)



The Canter boasts of a comfortable cabin with reclining seats and more than enough legroom.



Tilt and telescopic steering wheel

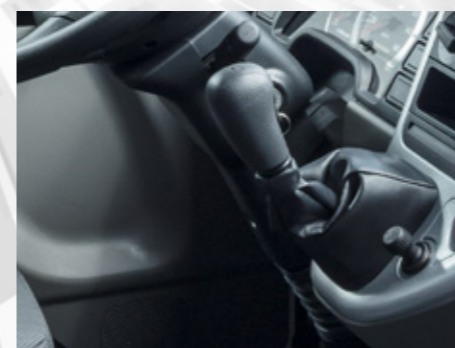

First-in-class dash-mounted gear shift lever



The tilt & telescopic adjustable steering wheel and dash-mounted gear shift location allows for the best driving position. (Audio head unit is customer option.)