

FJ

HEAVY DUTY



FUSO



FUSO FJ

DIMENSIONS & WEIGHT		FJ 1823R	FJ 2528C	FJ 2828R
Overall Length / Width / Height	(mm)	10,410 / 2,490 / 2,900	7,160 / 2,490 / 2,962	11,967 / 2,490 / 2,905
Wheelbase	(mm)	6,000	4,275	6,375
Wheel Tread (Front / Rear)	(mm)	2,045 / 1,805	2,045 / 1,805	2,045 / 1,805
Frame Width	(mm)	758	762	758
Curb Weight	(kg)	6,375	8,284	7,678
Gross Payload	(kg)	11,625	16,700	20,322
Gross Vehicle Weight (GVW)	(kg)	18,000	25,000	28,000
COMFORT				
Air Condition		Equipped	Equipped	Equipped
Central Door Lock		Equipped	Equipped	Equipped
Cruise Control		Equipped	Equipped	Equipped
Power Window		Equipped	Equipped	Equipped
ENGINE & TRANSMISSION				
Model		6S20	6S20	6S20
Type		4-Stroke Direct Injection Diesel with Turbocharger		
Cylinders		6 In-line	6 In-line	6 In-line
Displacement	(cc)	6,374	6,374	6,374
Bore x Stroke	(mm)	102 x 130	102 x 130	102 x 130
Max. Power	(Ps / rpm)	238 / 2,200	285 / 2,200	285 / 2,200
Max. Torque	(N-m / rpm)	850 / 1,200 - 1,600	1,120 / 1,200 - 1,600	1,120 / 1,200 - 1,600
Fuel Tank Capacity	(L)	260	290	380
AdBlue Tank Capacity	(L)	60	60	60
Transmission (Type)		6 Forward and 1 Reverse M/T (Synchromesh Type)	9 Forward and 1 Reverse M/T (Synchromesh Type)	
Transmission P.T.O.		Not Equipped	Equipped (Spline Type)	Not Equipped
AXLE				
Front / Rear		Reverse Elliot / Fully Floating		
Differential Lock		Inter-wheel	Inter-axle	Inter-wheel
SUSPENSION				
Front		Parabolic Leaf Spring with Telescopic Shock Absorber and Anti Roll Bar		
Rear		Semi-Elliptic Leaf Spring with Auxiliary Spring and Anti Roll Bar	Tandem Bogie with Anti-Roll Bar	Semi-Elliptic Balancer Type with Anti-Roll Bar
BRAKE				
Service		Fully Air S-Cam, Dual Circuit		
Parking		Pneumatically Operated Spring Actuator with Hand Brake Valve Acting on Rear Axle		
Auxiliary		Engine and Exhaust		
TIRE & WHEEL				
Tire (Front / Rear)		Tubeless 295 / 80R22.5	Radial 11.00 R20	Tubeless 295 / 80R22.5
Wheel		8.25 x 22.5	7.5 x 20	8.25 x 22.5
STEERING				
Gear Type		Hydraulic Power Assisted		
Power Steering		Equipped		
Steering Wheel Adjust		Tilt and Telescopic with Steering Lock		
SAFETY				
Seatbelt		3 pt. ELR x2 and 2 pt. Lapbelt (Center)		
Seatbelt Reminder		Equipped		
Collapsible Steering Wheel		Equipped		
Side Impact Beams		Equipped		
Anti-Lock Braking System (ABS)		Equipped		
ELECTRICAL SYSTEM				
Battery / Alternator		24V / 80A		

Photos and specifications may vary from actual unit. Sojitz Fuso Philippines reserves the right to change specifications without prior notice.

MITSUBISHI FUSO Authorised Distributor

SOJITZ FUSO PHILIPPINES CORPORATION

www.fuso.com.ph



*2 yrs or 100,000 KMs whichever comes first

FJ



The FJ's aerodynamic cab design reduces wind resistance thus reducing cabin noise while increasing fuel efficiency



Daytime Running Lights (DRL)




The intelligent meter cluster provides all the necessary information




The multi-adjustable air pressure driver's seat and tilt and telescopic adjustable steering wheel allow the driver to set the optimum driving position for comfort and performance.




The cruise control further lends a fatigue-free drive while the power windows adds convenience

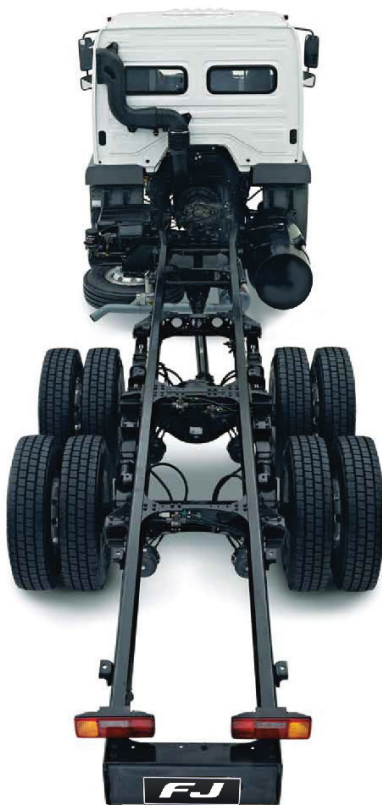


The frame is shot-peened and powder coated to prevent corrosion and increase durability. Higher flange width and web height also offer stability and load bearing ability leading to longer frame life while the alligator type cross members make it exceptionally strong.



The Fuso J-series is equipped with Anti-Lock Braking System (ABS)



The Differential Lock Buzzer informs driver of differential lock position

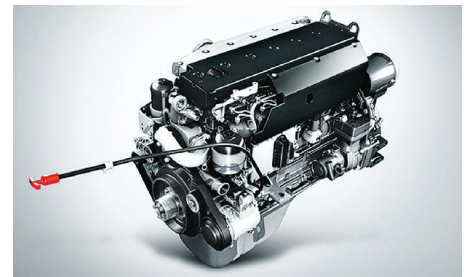

The direct injection diesel engine combines high output and flat torque for power hungry applications



The Fuso J-series is equipped with a smooth-shifting 9-speed manual transmission which provides a higher flexibility of gear selection for various operating conditions thereby enhancing driving performance and improving fuel efficiency