

# MINI BUS

## FUSO CANTER MINI BUS



DIMENSIONS & WEIGHT		CANTER MINI BUS
Overall Length / Width / Height	(mm)	8,645 / 2,250 / 3,500
Wheelbase	(mm)	4,750
Seating Capacity		35+1
Standing Capacity		10
Gross Vehicle Weight (GVW)	(kg)	8,550
SAFETY		
Seat belts		Partially Equipped
Collapsible Steering Wheel		Equipped
R.I.S.E. (Reinforced Impact Safety Evolution)		Equipped
Dashcam and Reverse Cameras		Equipped
Anti-Lock Braking System (ABS)		Equipped
Electronic Brakeforce Distribution (EBD)		Equipped
COMFORT		
CCTV Cameras		Equipped
Passenger Cabin TV		Equipped
Automatic Side Passenger Door		Equipped
Air Condition		Equipped
LED Route Signage		Equipped
ENGINE		
Model		4P10-WAT4
Type		Turbo-Intercooler, DOHC, Common-Rail Direct Injection, Diesel Engine
Cylinders		4 In-line
Displacement	(cc)	2,998
Max. Power	(Ps / rpm)	150 / 2,839
Max. Torque	(N-m / rpm)	370 / 1,400
Fuel Tank Capacity	(L)	100
TRANSMISSION		
Type		5 Forward, 1 Reverse M/T (Synchromesh Type)
AXLE		
Front		Reverse Elliot "I" Beam
Rear		Fully Floating
SUSPENSION		
Front and Rear		Laminated Leaf Springs with Shock Absorbers
Shock Absorber (Front and Rear)		Hydraulic Double Acting Telescopic
BRAKE		
Service		Disk Brake - Dual Circuit
Parking		Internal Expanding Type on Propeller Shaft
Auxiliary		Exhaust Brake
TIRE & WHEEL		
Tire	Front / Rear	(Tubeless) Single 215/75R17.5 / Dual 215/75R17.5
Wheel		17.5 x 6-127-9t, 6 studs
STEERING		
Gear Type		Ball and Nut Type with Integral Type Hydraulic Power Booster
Power Steering		Equipped
Steering Wheel Adjust		Tilt and Telescopic with Steering Lock
ELECTRICAL SYSTEM		
Electrical System		12V x2 (Parallel)
Battery		115D31L
Alternator		140 amperes

Photos and specifications may vary from actual unit. Sojitz Fuso Philippines reserves the right to change specifications without prior notice.



MITSUBISHI FUSO Authorised Distributor  
**SOJITZ FUSO PHILIPPINES CORPORATION**  
[www.fuso.com.ph](http://www.fuso.com.ph)

## TOP-NOTCH FEATURES

Tank capacity of 100 liters



Tire size of 215 / 75R17.5



Has laminated leaf springs with shock absorbers and hydraulic double-acting telescopic suspension



With a 12V x2 (parallel) setup, a 115D31L battery, and a 140-amp alternator



With dual-circuit disk brakes, an internal expanding parking brake on the propeller shaft, and an exhaust brake



Equipped with anti-lock braking system (ABS) and electronic brake distribution (EBD)

## ACCESSIBLE AND SAFE

Equipped with a user-friendly wheelchair ramp, providing easy and safe access for passengers with mobility needs.




Equipped with a dedicated wheelchair hook, ensuring accessibility and safety for passengers with mobility needs.



## FUSO POWERTRAIN

4P10-KAT4: clean, fuel-efficient performance and powerful driving

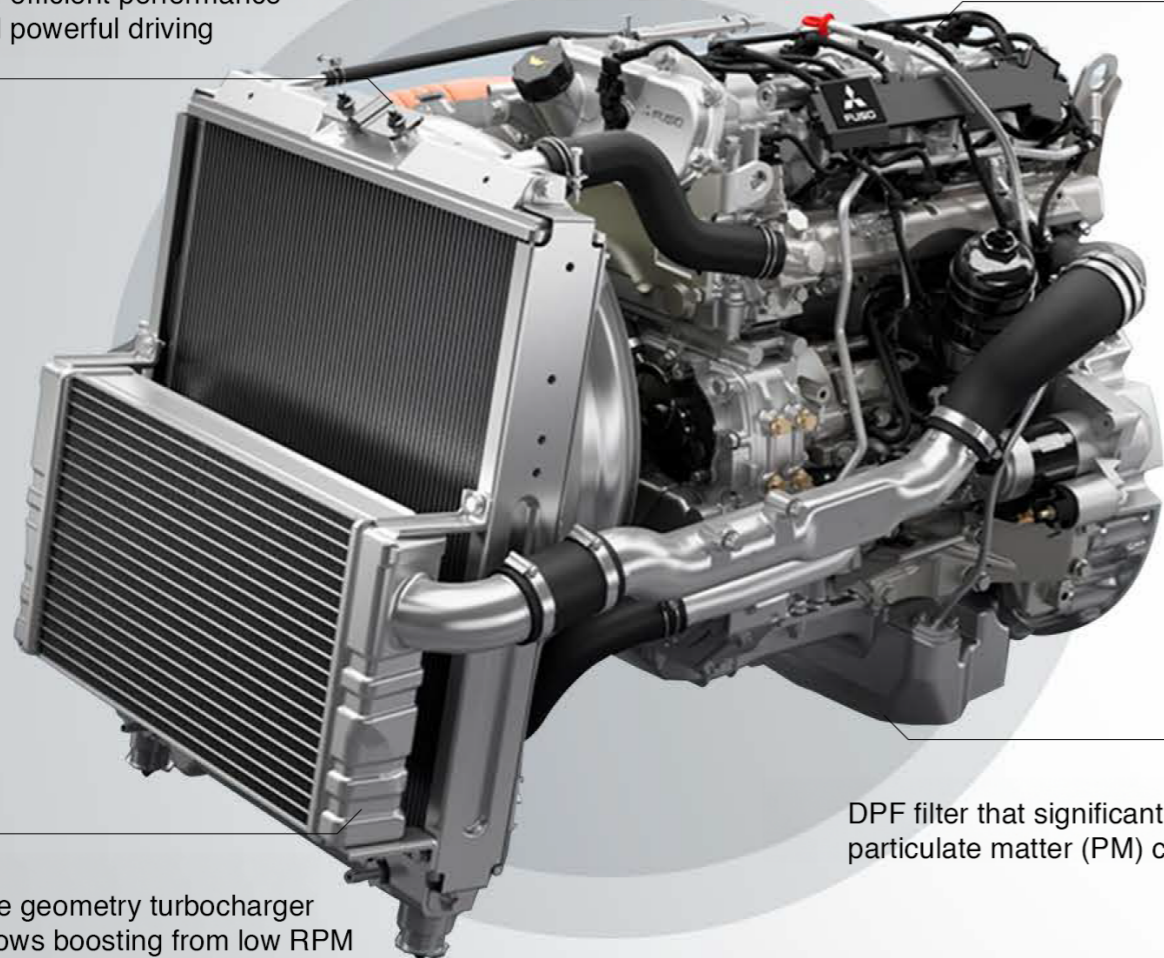

High-pressure injectors for better fuel efficiency

DPF filter that significantly reduces particulate matter (PM) contamination

Variable geometry turbocharger that allows boosting from low RPM



## ERGONOMIC



Ergonomic dashboard and a tilt and telescopic steering wheel, ensuring optimal comfort driving experience.

Designed for optimal passenger comfort, has a seating capacity of 35.

An ideal choice for tours and shuttle services, it can also be used for public transportation (with COC).

With a spacious luggage compartment, offering a maximum capacity of 200kg for all your storage needs.

# MINI BUS